

Godox 神牛

LED Video Light

LED摄影灯



## 神牛摄影器材有限公司

GODOX Photo Equipment Co., Ltd.

地址/Add: 深圳市宝安区福永镇福洲大道西新和村华发工业园A4栋  
Building A4, Xinhe Huafa Industrial Zone, Fuzhou RD West, Fuyong  
Town, Baoan District, Shenzhen 518103, China

电话/Tel: +86-755-29609320(8062) 传真/Fax: +86-755-25723423

邮箱/E-mail: [godox@godox.com](mailto:godox@godox.com)

<http://www.godox.com>

705-L12000-00

Made In China CE RoHS

Instruction Manual | 说明手册  
Chinese English Bilingual | 中英文双语

型号: LEDP120C

## Foreword

Thank you for purchasing this Godox product!

**LEDP120C** video light is excellent for macrophotography, wedding shooting, product shooting, photojournalistic and video recording, etc. The lightweight and portable light provides high brightness, convenient operation and accurate color temperature.

### Features:

- High-quality LED bulbs
- Using lithium battery with great portability
- Soft and even illumination
- Included with a L-type bracket
- Adjustable light brightness and color temperature
- Fits almost any cameras and camcorders


Type	Model
Changeable Version(Color Temperature 3300K~5600K)	LEDP120C

## For your safety

- ⚠ Do not place in high temperature or high humidity conditions.
- ⚠ Do not handle with wet hands, immerse in water, or expose to rain.
- ⚠ Observe precautions when handling batteries:
  - Do not put batteries into a fire or apply direct heat to it.
  - Batteries are prone to leakage when fully discharged. To avoid damage to the product, be sure to remove batteries out when the product will not be used for a long time or when batteries run out of charge.
  - Should liquid from batteries come into contact with skin or clothing, rinse immediately with fresh water.

## Parts

### • Body

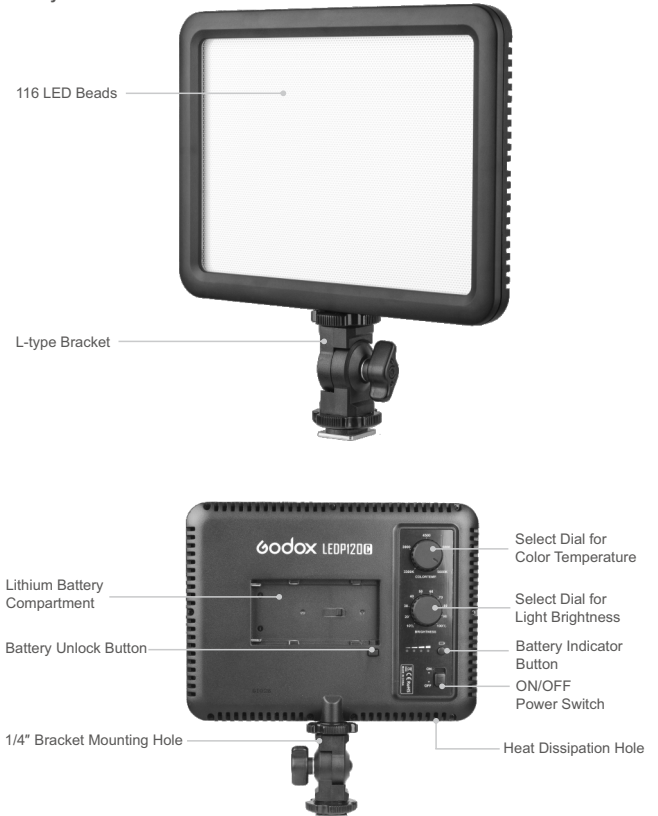

# Power Management

## 1. Power Supply

One power supply modes is available:



Battery Indicator Button

- Using lithium battery: This light uses SONY NP-F970 model lithium battery.

**Note:** When using lithium battery, press the Battery Indicator Button and the battery level will be displayed.

## 2. Installing Lithium Battery

- Turn the Power Switch off.
- Target the socket of the lithium battery towards the "+" "-" contacts of the Battery Compartment. Push the battery in until it locks.
- Power the light on.
- After using the light, please power it off.
- When removing the battery, hold down the Battery Unlock Button and push out the battery in the opposite direction of pushing in.



# Using the Video Light

## 1. On the Camera

- Install the L-type Bracket onto the 1/4" Bracket Mounting Hole and tighten the upper locking ring of the L-type Bracket.
- Screw the lower locking ring of the L-type Bracket to the highest point and insert the Camera Hotshoe Connection horizontally into the hotshoe of a camera or a camcorder. Tighten the lower locking ring.



## 2. By the Handle

- Install the L-type Bracket onto the 1/4" Bracket Mounting Hole and tighten the upper locking ring of the L-type Bracket.



## 3. On the Light Stand

- Install the light stand onto the 1/4" Bracket Mounting Hole



**Note:** If your camcorder has no hotshoe connection, it is advised to purchase a camcorder connecting bracket in the market and install the video light through its 1/4" Bracket Mounting Hole.

# Operation

## 1. Before Usage

- Insert the lithium battery.
- Switch the power on, the video light giving out light.



## 2. Light Brightness/Color Temperature Adjustment

### Adjusting Light Brightness

- Turn the Select Dial for Light Brightness to adjust the light brightness.

Model	Color Temperature	Light Brightness Range
Changeable Version (LEDP120C)	3300K~5600K	10%~100%

### Adjusting Color Temperature

- Turn the Select Dial for Color Temperature to adjust color temperature.  
Color temperature range:

Model	Color Temperature Range
Changeable Version (LEDP120C)	3300K~5600K

# What's in the Box of LEDP120C?

NO.	Included Item	LEDP120C(3300K~5600K)
1	LEDP120C Video Light	1 PC
2	L-type Bracket	1 PC



LEDP120C Video Light



L-type Bracket

# Technical Data

Video Light	Changeable Version LEDP120C
Lithium Battery	7.4V Lithium Battery (NP-F970 model lithium battery) (sold separately)
Power	Max. 12W
Color Temperature	5600K±300K
Brightness(LUX)	580 (0.5m/4500K)
	630 (0.5m/3300K)
	680 (0.5m/5600K)
Color Rendering Index	>95
TLCI(Qa)	>95
Light Brightness Range	10%~100%
LED Beads Quantity	116
Operation Temperature	-10~50°C
Dimension	175mm*130mm*17mm (not with the L-type Bracket)
Net Weight	220g

\* Product design and specifications are subject to change without notice.